


Inground 50 Bronze

Data Sheet

image not found or type unknown



Physical Specification


Body	Quality corrosion resistant brass construction.
Lens	Opal Clear Lens fitted in Standard configuration. Frosted Polycarbonate Lens, Hex Louvre, Glare Shield available for Custom configuration.
Reflector	LEDiL TINA-Y Optics available for Custom configuration.
Mounting Options	Ground or deck mounted. Suitable for timber, concrete, or masonry application. Supplied with custom designed Mounting Collar. Also works with standard grey PVC 40mm electrical conduit.
Weight (kg)	0.7
Operating Temperature	'-20°C to +50°C
IP Rating	IP67

Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	1.1 watt.
Driver	Driver onboard technology.
Remote Power Supply	Gardens at Night fittings should only be connected to approved Gardens at Night 24VDC Constant Voltage (CV) Power Supplies.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control.

Finishes

image not found or type unknown



1m
1m

Installation Instructions

Ground or deck mounted. Suitable for timber, concrete and masonry applications. Fitting is compatible with Ø40mm grey PVC electrical conduit for concrete installation. Mounting Collar (included), is compatible with Ø38mm cored hole for decking installation. Refer to Product Page or Technical Resource

Refer to Product Page or Technical Resources page to download Installation Sheet.


Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix or copy the standard item code below to order:

GANL-IG50-1W-2700-OP-BZE-1m

Image not found or type unknown

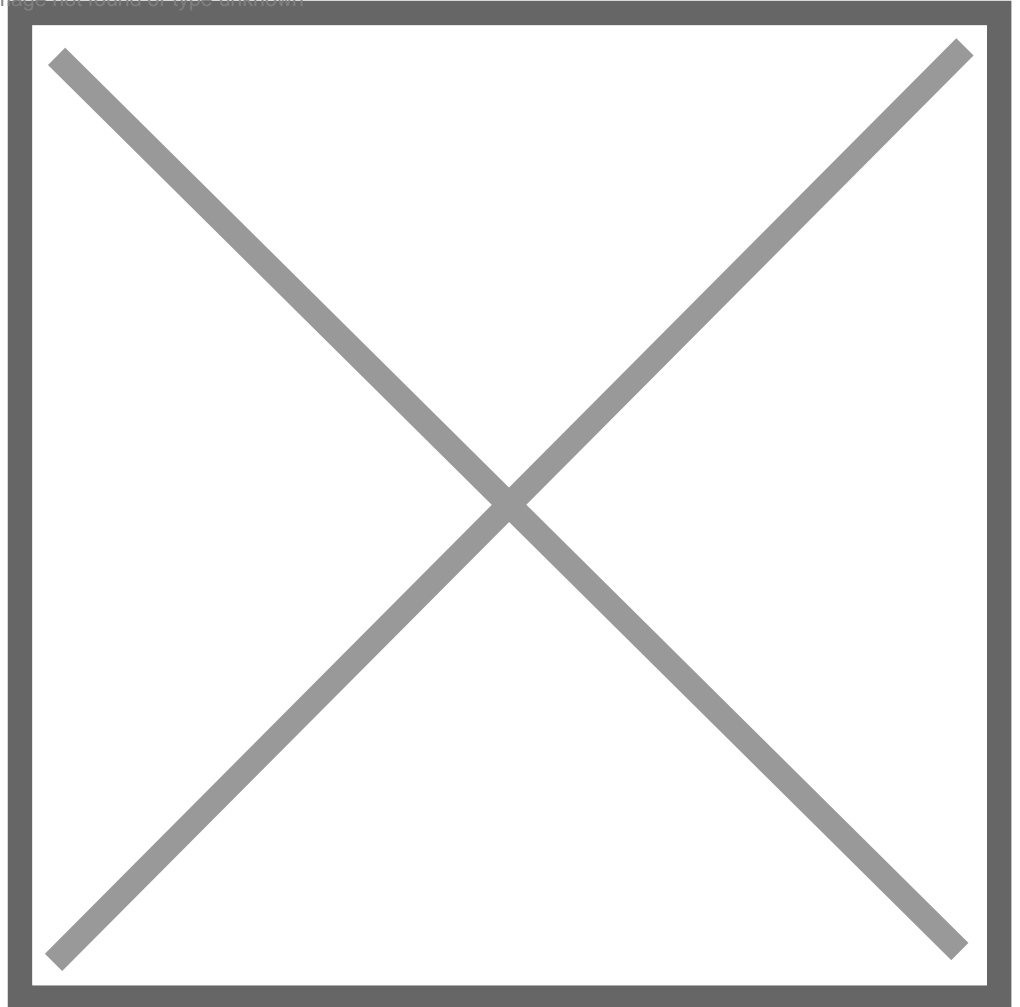


Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-IG50-1W-CV-24VDC-2700-X-40-BZE-OP-1M

Image not found or type unknown

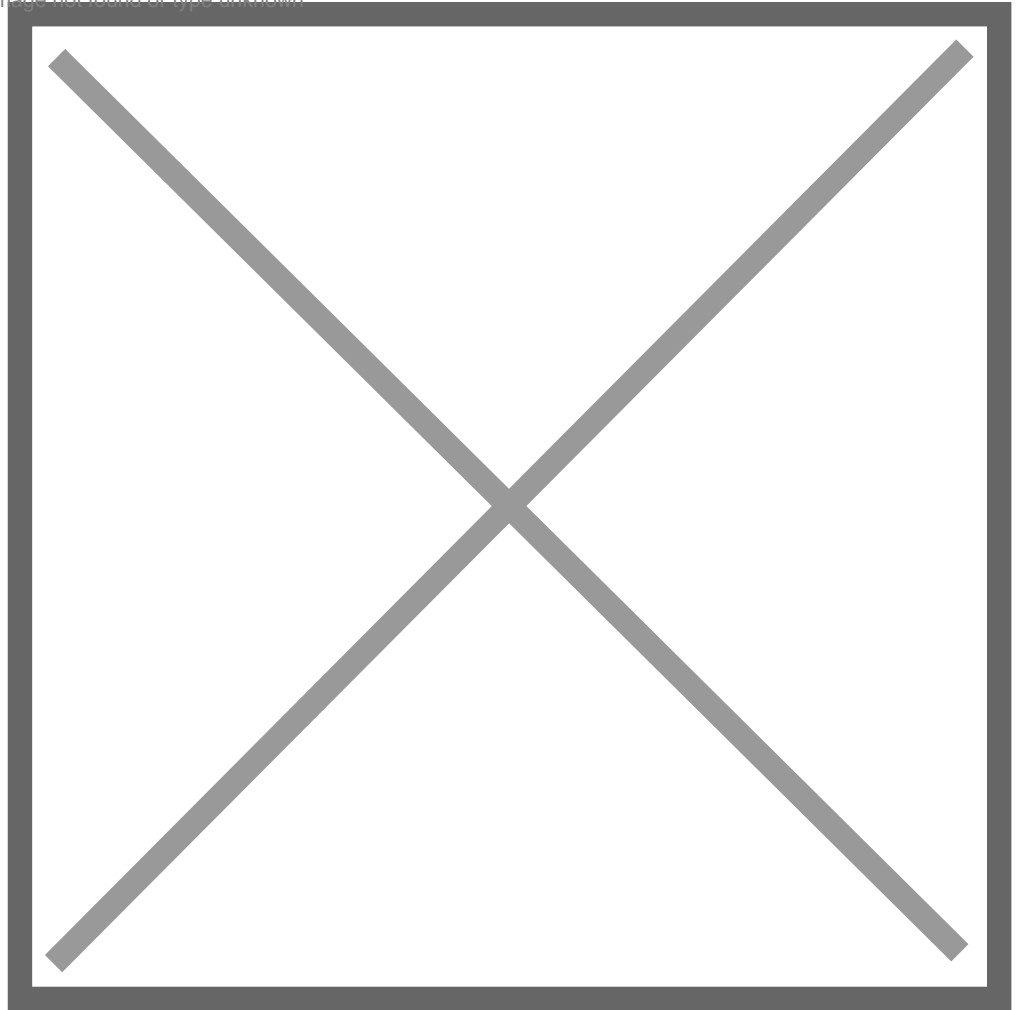

Warranty

5 years.

Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

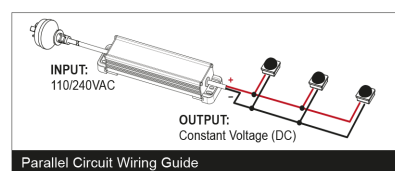


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.