




Inground 50 Stainless Steel 1M

Data Sheet



Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Clear glass with internal Opal Lens fitted in Standard configuration.
Optic	LEDiL TINA-Y Optics available for Custom configuration.
Optional Accessories	Frosted Polycarbonate Lens, Hex Louvre, Glare Shield available for Custom configuration.
Mounting Options	Ground or deck mounted. Suitable for concrete, masonry or timber application. Supplied with custom designed Mounting Collar. Also works with standard grey PVC 40mm electrical conduit.
Weight (kg)	0.7
Operating Temperature	-20°C to +50°C
IP Rating	IP67

Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	1.1 watt.
Driver	Driver onboard technology.
Remote Power Supply	Gardens at Night fittings should only be connected to approved Gardens at Night 24VDC Constant Voltage (CV) Power Supplies.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control.

Finishes



■	BLK	Matt Black PVD
■	BZE	Bronze
■	COP	Copper
■	SS	Stainless Steel

Installation Instructions

Ground or deck mounted. Suitable for concrete, masonry or timber application. Fitting is compatible with Ø40mm grey PVC electrical conduit for concrete installation. Mounting Collar (included), is compatible with Ø38mm cored hole for decking installation. Refer to Technical Resources.

Refer to Product Page or Technical Resources page to download Installation Sheet.

Inground 50 Stainless Steel 1M

Data Sheet

Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish and cable length to the end of the code matrix or copy the Standard item code below:

GANL-IG50-1W-2700-OP-SS-xxM

GANL	IG50	1W	2700	OP	FINISH	xxM
GAN PREFIX	SERIES	TOTAL LOAD	COLOUR TEMP (K)	LENS	FINISH	CABLE
GANL	IG50	1W	2700	OP	BLK	1M
					BZE	15M
					COP	
					SS	

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-IG50-1W-CV-24VDC-2700-X-SS-OP-xxM

GANX	IG50	1W	CV	24DC	2700	X	FINISH	OP	xxM
GAN PREFIX	SERIES	TOTAL LOAD	INPUT TYPE	INPUT VOLTAGE	COLOUR TEMP (K)	OPTIC	FINISH	ACCESSORY OPTIONS	CABLE
GANX	IG50	1W	CV	24DC	2700	RS-Spot	BLK	OP	1M
					3000	M-Medium	BZE	GS-Glare Shield only	15M
						W-Wide	COP	HX-Hex Louvre only	
						WW-Extra Wide	SS	FR-Frosted only	
						WWW-Ultra Wide		GSHX-Glare Shield and Hex Louvre	
						O-Oval		GSFR-Glare Shield and Frosted	
						X		HXFR-Hex Louvre and Frosted	
								X	

Warranty

5 years.

Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

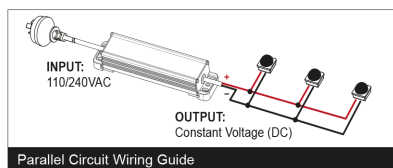


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.