


PWM Power Filter

Data Sheet



Physical Specification

Body	Manufactured from corrosion-resistant UV-stable materials (ASA). Resin potted.
Mounting Options	Wall mounted. Suitable for concrete, masonry and timber mounting.
Weight (kg)	0.5
Operating Temperature	-20°C to +50°C
IP Rating	IP67

Electrical Specification and Performance

Input Voltage	24VDC
Total Load	300W 12.5A
Remote Power Supply	The PWM Power Filter is designed for use with a single compatible 24VDC Constant Voltage dimmable Power Supply Unit with PWM output
Control	The PWM Power Filter must be installed in-line on the secondary side of the Power Supply Unit
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control

Installation Instructions

Wall mounted.

Refer to Product Page or Technical Resources page to download Installation Sheet.

Warranty

5 years.

Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

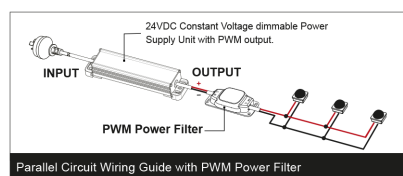


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

PWM Power Filter

Data Sheet

Accessories

The PWM Power Filter is designed for use with a single compatible 24VDC Constant Voltage dimmable Power Supply Unit with PWM output and must be installed in-line on the secondary side of the Power Supply Unit



POWER
SUPPLY
UNIT 150W



POWER
SUPPLY
UNIT 300W



POWER
SUPPLY
UNIT 60W

Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



DC CABLE
2.9MM² 100M



ADHESIVE
LINED END
CAP 12-4MM
50 PIECES



ADHESIVE
LINED TUBE
24-6MM X
110MM 10
PIECES