

Step Light Round Recessed 50 White - NEW - Available November 2026

Data Sheet


Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Opal Lens fitted in Standard configuration. Frosted Polycarbonate Lens, Hex Louvre, Glare Shield available for Custom configuration.
Optic	LEDiL TINA-Y Optics available for Custom configuration.
Mounting Options	Suitable for timber, concrete and masonry applications. Compatible with the Installation Canister 40 (sold separately), this machined canister offers a precise fit and efficient installation solution for concrete and masonry applications. Fitting is also compatible with Ø40mm grey PVC electrical cond
Weight (kg)	0.7
Operating Temperature	-20°C to +50°C
IP Rating	IP67

Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	1.1 watt.
Driver	Driver onboard technology.
Remote Power Supply	Gardens at Night fittings should only be connected to approved Gardens at Night 24VDC Constant Voltage (CV) Power Supplies.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control.

Finishes

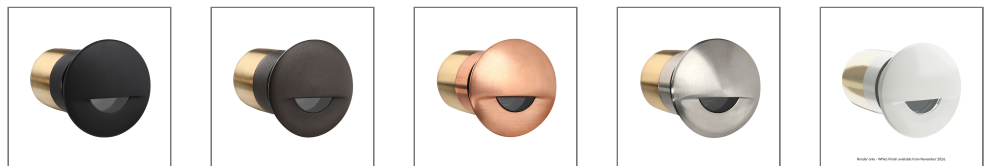

■ BLK	Matt Black PVD
■ BZE	Bronze
■ COP	Copper
■ SS	Stainless Steel
□ WHT	White

Installation Instructions

Recessed step or wall mounted. Suitable for timber, concrete & masonry applications. Compatible with Canister GANAN-IC-40x200 (concrete/masonry). Also compatible with Ø40mm grey PVC electrical conduit (concrete). Mounting Collar (included) is compatible with Ø38mm cored hole for timber install.

Refer to Product Page or Technical Resources page to download Installation Sheet.

Step Light Round Recessed 50 White - NEW - Available November 2026

Data Sheet

Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish and cable length to the end of the code matrix or copy the Standard item code below:

GANL-SLRR50-1W-2700-WWW-WHT

GANL	SLRR50	1W	2700	WWW	FINISH
GAN PREFIX	SERIES	TOTAL LOAD	COLOUR TEMP (K)	OPTIC	FINISH
GANL	SLRR50	1W	2700	WWW	BLK
					BZE
					COP
					SS
					WHT

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-SLRR50-1W-CV-24DC-2700-WWW-WHT-X-xxM

GANX	SLRR50	1W	CV	24DC	2700	WWW	FINISH	X	xxM
GAN PREFIX	SERIES	TOTAL LOAD	INPUT TYPE	INPUT VOLTAGE	COLOUR TEMP (K)	OPTIC	FINISH	ACCESSORY OPTIONS	CABLE
GANX	SLRR50	1W	CV	24DC	2700	● RS-Spot	BLK	■ HX-Hex Louvre only	1M
					3000	● M-Medium	BZE	● FR-Frosted only	15M
						● W-Wide	COP	■ HXFR-Hex Louvre and Frosted	
						● WW-Extra Wide	SS	X	
						● WWW-Ultra Wide	WHT		
						X			

Warranty

5 years.

Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

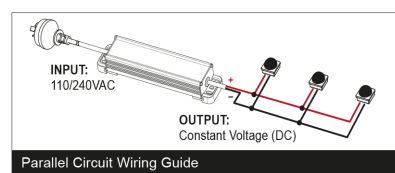


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

Step Light Round Recessed 50 White - NEW - Available November 2026

Data Sheet

Accessories

PVC Canister available to assist with installation.



CANISTER
40X200

Related Fittings in Range


The following fittings are also available in the Step Lights range.



STEP LIGHT
ROUND
RECESSED
50 BLACK



STEP LIGHT
ROUND
RECESSED
50 BRONZE



STEP LIGHT
ROUND
RECESSED
50 COPPER



STEP LIGHT
ROUND
RECESSED
50
STAINLESS
STEEL