


# Hanging Light 5 Speckle Bronze

Data Sheet



## Physical Specification

|                       |                                                                                                                                          |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Body                  | Quality corrosion resistant brass construction.                                                                                          |
| Lens                  | Clear tempered glass.                                                                                                                    |
| Reflector             | High efficiency, reflective coated polycarbonate. 40ø reflector fitted Standard. 20ø/60ø optional. Refer to Custom Configuration Matrix. |
| Mounting Options      | Ceiling Suspended. Chain (175mm, 6 links) included. Additional matching Chain (470mm, 17 links) available.                               |
| Weight (kg)           | 1                                                                                                                                        |
| Operating Temperature | -20øC to +50øC                                                                                                                           |
| IP Rating             | IP66                                                                                                                                     |

## Electrical Specification and Performance

|                     |                                                                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage       | 24VDC.                                                                                                                                     |
| Total Load          | 4 watts. >90 lumens per watt.                                                                                                              |
| Driver              | Driver onboard technology.                                                                                                                 |
| Remote Power Supply | Recommended Meanwell HLG Series 24VDC constant voltage (sold separately). Consider adding remote control and constant voltage.             |
| Control             | Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage. |
| Dimming             | Triac or Dali available with approved Power Supply and compatible dimming control                                                          |
| Certifications      |  E4635                                                  |

## Finishes



- BLK Matt Black powder coat
- BZE Bronze
- COP Copper

## Installation Instructions

Ceiling Suspended. Chain (175mm, 6 links) included. Additional matching Chain (470mm, 17 links) available.

Refer to Product Page or Technical Resources page to download Installation Sheet.

# Hanging Light 5 Speckle Bronze

Data Sheet

## Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix as shown below.

| GANL          | HLS5   | 4W            | 2700                | 40D       | FINISH |
|---------------|--------|---------------|---------------------|-----------|--------|
| GAN<br>PREFIX | SERIES | TOTAL<br>LOAD | LIGHT<br>SOURCE (K) | REFLECTOR | FINISH |
| GANL          | HLS5   | 4W            | 2700                | ▼ 40D     | BLK    |
|               |        |               |                     |           | BZE    |
|               |        |               |                     |           | COP    |

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available. Production, costs and timing will vary depending on customisation. For assistance, speak to your local Commercial Distributor.

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

| GANX          | HLS5   | 4W            | X       | CV            | 24VDC            | 2700                | 80  | 40        | FINISH | X             | CL   |
|---------------|--------|---------------|---------|---------------|------------------|---------------------|-----|-----------|--------|---------------|------|
| GAN<br>PREFIX | SERIES | TOTAL<br>LOAD | DIMMING | INPUT<br>TYPE | INPUT<br>VOLTAGE | LIGHT<br>SOURCE (K) | CRI | REFLECTOR | FINISH | HEX<br>LOUVRE | LENS |
| GANX          | HLS5   | 4W            | D       | CV            | 24VDC            | 2700                | 80  | ▼ 20D     | BLK    | HX            | CL   |
|               |        |               | X       |               |                  | 3000                | 90  | ▼ 40D     | BZE    | X             | FR   |
|               |        |               |         |               |                  | 4000                | 90  | ▼ 60D     | COP    |               |      |

Dimming: Triac or Dali available with approved Power Supply and compatible dimming control

## Light Performance



Photometrics

Photometrics

Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.

IES

IES Refer to Technical Resources page to download IES file.

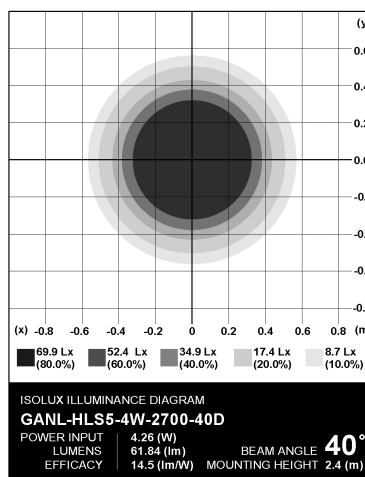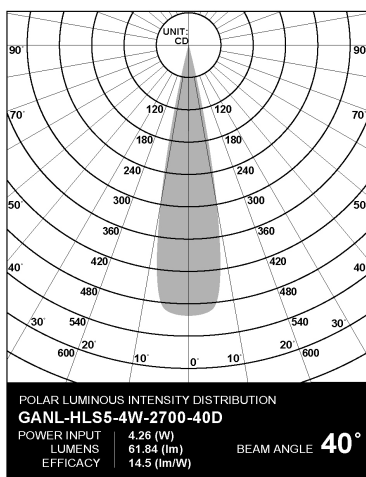

# Hanging Light 5 Speckle Bronze

Data Sheet

## Warranty

5 years. Applicable on purchases from 01/01/19.  
 Refer to Technical Resources page to download Warranty Statement.

## Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.


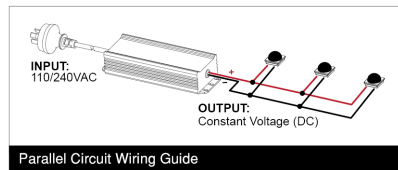


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

## Accessories

Associated accessories sold separately. Refer to Accessories.



HANGING  
 LIGHT CHAIN  
 BZE

## Related Items for Installation


The following items are available to assist with installation and/or warranty compliance.



DC CABLE  
 2.9MM² 100M



ADHESIVE  
 LINED END  
 CAP 12-4MM  
 50 PIECES



ADHESIVE  
 LINED TUBE  
 24-6MM X  
 110MM 10  
 PIECES



POWER  
 SUPPLY  
 UNIT 60W

## Hanging Light 5 Speckle Bronze

---

Data Sheet

### Related Fittings in Range

---

The following fittings are also available in the Overhead Lights range.



HANGING  
LIGHT 5 BZE