


# Hanging Light 5 Speckle Bronze


Data Sheet

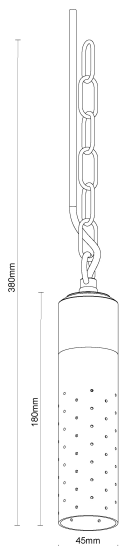

## Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Clear tempered glass.
Reflector	High efficiency, reflective coated polycarbonate. 40ø reflector fitted Standard. 20ø/60ø optional. Refer to Custom Configuration Matrix.
Mounting Options	Ceiling Suspended. Chain (175mm, 6 links) included. Additional matching Chain (470mm, 17 links) available.
Weight (kg)	1
Operating Temperature	-20øC to +50øC
IP Rating	IP66

## Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	4 watts. >90 lumens per watt.
Driver	Driver onboard technology.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately). Consider adding remote control and constant voltage.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control
Certifications	

## Finishes



- BLK Matt Black powder coat
- BZE Bronze
- COP Copper

## Installation Instructions

Ceiling Suspended. Chain (175mm, 6 links) included. Additional matching Chain (470mm, 17 links) available.

Refer to Product Page or Technical Resources page to download Installation Sheet.

# Hanging Light 5 Speckle Bronze

Data Sheet

## Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix or copy the standard item code below to order:

GANL-HLS5-4W-2700-40D-BZE

GANL	HLS5	4W	2700	40D	FINISH
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>LIGHT SOURCE (K)</b>	<b>REFLECTOR</b>	<b>FINISH</b>
GANL	HLS5	4W	2700	40D	BLK
					BZE
					COP

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-HLS5-4W-X-CV-24VDC-2700-80-40-BZE-X-CL

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

GANX	HLS5	4W	X	CV	24VDC	2700	80	40	FINISH	X	CL
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>DIMMING</b>	<b>INPUT TYPE</b>	<b>INPUT VOLTAGE</b>	<b>LIGHT SOURCE (K)</b>	<b>CRI</b>	<b>REFLECTOR</b>	<b>FINISH</b>	<b>HEX LOUVRE</b>	<b>LENS</b>
GANX	HLS5	4W	D	CV	24VDC	2700	80	20D	BLK	HX	CL
			X			3000	90	40D	BZE	X	FR
						4000	90	60D	COP		

Dimming: Triac or Dali available with approved Power Supply and compatible dimming control

# Hanging Light 5 Speckle Bronze

Data Sheet

## Light Performance


Photometrics

Photometrics

Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.

IES

IES Refer to Technical Resources page to download IES file.

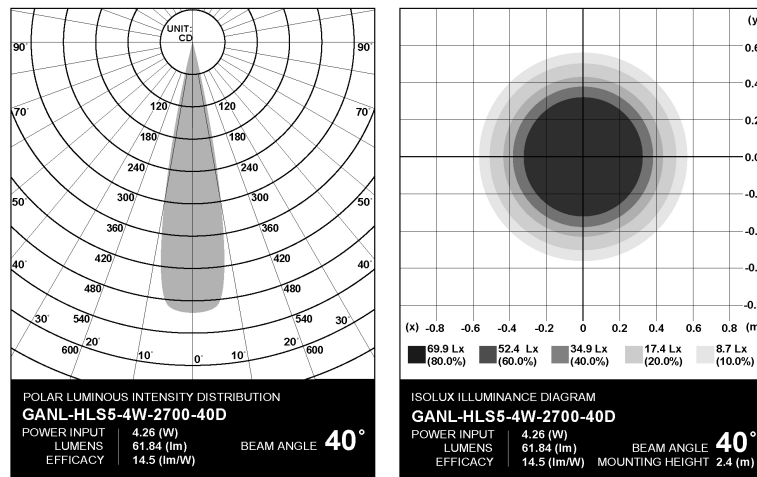

## Warranty

5 years.

Refer to Technical Resources page to download Warranty Statement.

## Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.


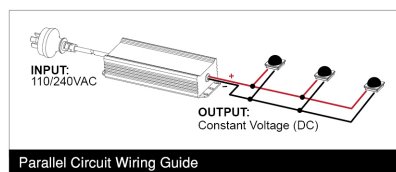


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

## Accessories

Associated accessories sold separately. Refer to Accessories.



**HANGING  
 LIGHT CHAIN  
 BZE**

# Hanging Light 5 Speckle Bronze

Data Sheet

## Related Items for Installation


The following items are available to assist with installation and/or warranty compliance.



DC CABLE  
2.9MM<sup>2</sup> 100M



ADHESIVE  
LINED END  
CAP 12-4MM  
50 PIECES



ADHESIVE  
LINED TUBE  
24-6MM X  
110MM 10  
PIECES



POWER  
SUPPLY  
UNIT 60W

## Related Fittings in Range

The following fittings are also available in the Overhead Lights range.



HANGING  
LIGHT 5 BZE