gardens at night™
landscape lighting

Path Light Dome 110 Copper

Data Sheet

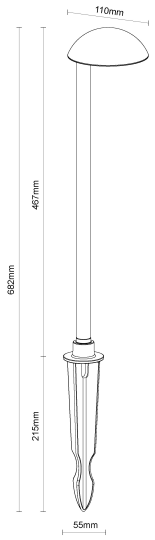

Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Frosted tempered glass.
Mounting Options	Ground mounted. Stake (215mm) included. Surface Mount accessory available.
Weight (kg)	1.8
Operating Temperature	-20øC to +50øC
IP Rating	IP66

Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	4 watts. >90 lumens per watt.
Driver	Driver onboard technology.
Remote Power Supply	Gardens at Night fittings should only be connected to approved Gardens at Night 24VDC Constant Voltage (CV) Power Supplies.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control
Certifications	E4635

Finishes

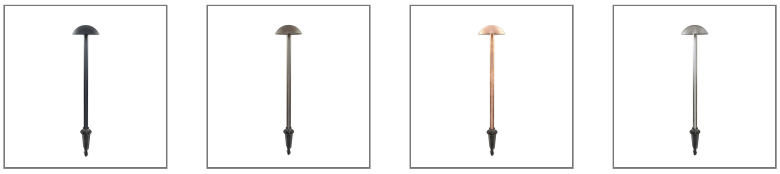

- BLK Matt Black powder coat
- BZE Bronze
- COP Copper
- NKL Nickel

Installation Instructions

Ground mounted. Stake (215mm) included. Surface Mount accessory available.
Refer to Product Page or Technical Resources page to download Installation Sheet.

Gardens at Night is a business of Serrata Group Pty Ltd. Serrata Group does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in relevance thereon. Data subject to change.

Path Light Dome 110 Copper

Data Sheet

Standard or Custom Configurations

Standard range - locally stocked item
Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix or copy the standard item code below to order:

GANL-PLD110-4W-2700-COP

GANL	-	PLD110	-	4W	-	2700	-	FINISH
GAN PREFIX	-	SERIES	-	TOTAL LOAD	-	LIGHT SOURCE (K)	-	FINISH
GANL		PLD110		4W		2700		BLK
								BZE
								COP
								NKL

Custom configuration - commercial specification
If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-PLD110-4W-X-CV-24VDC-2700-80-COP-FR

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

GANX	-	PLD110	-	4W	-	X	-	CV	-	24VDC	-	2700	-	80	-	FINISH	-	FR
GAN PREFIX	-	SERIES	-	TOTAL LOAD	-	DIMMING	-	INPUT TYPE	-	INPUT VOLTAGE	-	LIGHT SOURCE (K)	-	CRI	-	FINISH	-	LENS
GANX		PLD110		4W		D		CV		24VDC		2700	-	80		BLK		FR
						X						3000	-	90		BZE		
												4000	-	90		COP		
																NKL		

Dimming: Triac or Dali available with approved Power Supply and compatible dimming control

Light Performance

Photometrics	Photometrics Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.
IES	IES Refer to Technical Resources page to download IES file.

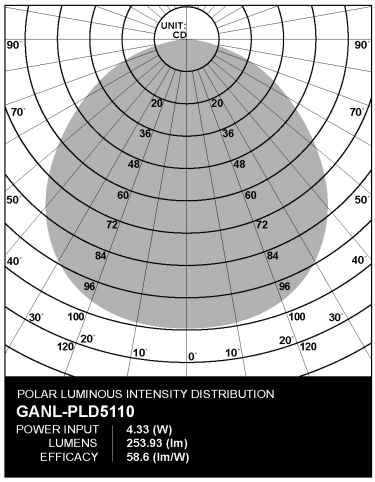

POLAR LUMINOUS INTENSITY DISTRIBUTION
GANL-PLD5110

POWER INPUT	4.33 (W)
LUMENS	253.93 (lm)
EFFICACY	58.6 (lm/W)

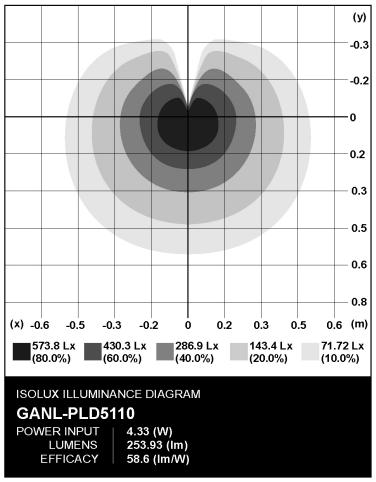

ISOLUX ILLUMINANCE DIAGRAM
GANL-PLD5110

POWER INPUT	4.33 (W)
LUMENS	253.93 (lm)
EFFICACY	58.6 (lm/W)

Gardens at Night is a business of Serrata Group Pty Ltd. Serrata Group does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in relevance thereon. Data subject to change.

Path Light Dome 110 Copper

Data Sheet

Warranty

5 years.
Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Techncial Resources page to download Wiring Diagram/s.

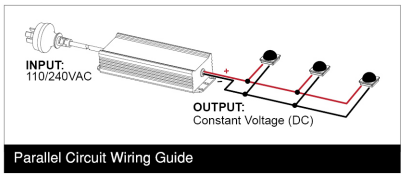

Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

Accessories

Associated accessories sold separately. Refer to Accessories.

SURFACE MOUNT COP

Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.

DC CABLE 2.9MM² 100M

ADHESIVE LINED END CAP 12-4MM 50 PIECES

POWER SUPPLY UNIT 60W

Related Fittings in Range

The following fittings are also available in the Path Lights range.

PATH LIGHT LINEAR 112 COP

Gardens at Night is a business of Serrata Group Pty Ltd. Serrata Group does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in relevance thereon. Data subject to change.