


# Lantern Light 5 Bronze


Data Sheet



## Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Frosted Polycarbonate
Reflector	High efficiency, reflective coated polycarbonate. 40ø reflector fitted Standard. 20ø/60ø optional. Refer to Custom Configuration Matrix.
Mounting Options	Ground or surface. Mounting adapter plate included.
Weight (kg)	0
Operating Temperature	-20øC to +50øC
IP Rating	IP66

## Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	4 watts. >90 lumens per watt.
Driver	Driver onboard technology.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately). Consider adding remote control and constant voltage.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control
Certifications	

## Finishes



■ BZE Bronze

## Installation Instructions

Ground or surface. Mounting adapter plate included.  
 Refer to Product Page or Technical Resources page to download Installation Sheet.

# Lantern Light 5 Bronze

Data Sheet

## Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix as shown below.

GANL	LL5	4W	2700	BZE
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>LIGHT SOURCE (K)</b>	<b>FINISH</b>
GANL	LL5	8W	2700	BZE

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available. Production, costs and timing will vary depending on customisation. For assistance, speak to your local Commercial Distributor.

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

GANX	LL5	4W	X	CV	24VDC	2700	80	BZE	FR
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>DIMMING</b>	<b>INPUT TYPE</b>	<b>INPUT VOLTAGE</b>	<b>LIGHT SOURCE (K)</b>	<b>CRI</b>	<b>FINISH</b>	<b>LENS</b>
GANX	LL5	4W	D	CV	24VDC	2700	80	BZE	FR
			X			3000	90		
						4000	90		

Dimming: Triac or Dali available with approved Power Supply and compatible dimming control

## Light Performance

Photometrics

Photometrics

Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.

## Warranty

5 years. Applicable on purchases from 01/01/19.

Refer to Technical Resources page to download Warranty Statement.

## Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

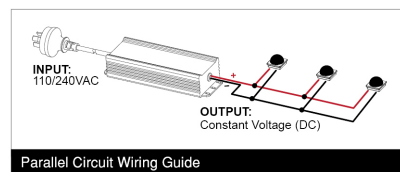


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

## Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



DC CABLE  
2.9MM<sup>2</sup> 100M



ADHESIVE  
LINED END  
CAP 12-4MM  
50 PIECES



POWER  
SUPPLY  
UNIT 60W