

# Linear Neon Side Flex 5m


GANL-LNSF6x12-5m

Data Sheet

## Physical Specification

Body	Silicone construction.
Mounting Options	Surface mounted. Suitable for concrete, masonry and timber mounting. Mount Channel required.
Weight (kg)	3
Operating Temperature	-20øC to +50øC
IP Rating	IP67

## Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	8 watts per metre. 450 lumens per metre.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately).
Control	Requires clean on/off signal. If switching via automation relays use on/off.
Dimming	0-10v Dimmable PSU
Certifications	 <b>CE RoHS</b>

## Installation Instructions

Surface mounted. Suitable for concrete, masonry and timber mounting. Mount Channel required. Refer to Product Page or Technical Resources page to download Installation Sheet.

## Warranty

3 years.  
 Refer to Technical Resources page to download Warranty Statement.

## Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

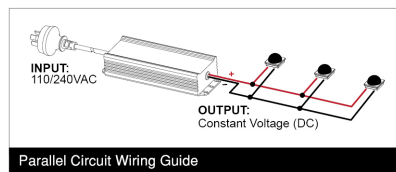


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.


# Linear Neon Side Flex 5m

GANL-LNSF6x12-5m

Data Sheet

## Accessories

Associated accessories sold separately. Refer to Accessories.



NEON SIDE  
FLEX  
CHANNEL  
6X12 1M

## Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



DC CABLE  
2.9MM<sup>2</sup> 100M



ADHESIVE  
LINED END  
CAP 12-4MM  
50 PIECES



POWER  
SUPPLY  
UNIT 60W