

Linear Neon Side Flex 1m


GANL-LNSF6x12-1m

Data Sheet

Physical Specification

Body	Silicone construction.
Mounting Options	Surface mounted. Suitable for concrete, masonry and timber mounting. Mount Channel required.
Weight (kg)	1
Operating Temperature	-20øC to +50øC
IP Rating	IP67

Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	8 watts per metre. 450 lumens per metre.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately).
Control	Requires clean on/off signal. If switching via automation relays use on/off.
Dimming	0-10v Dimmable PSU
Certifications	 CE RoHS

Installation Instructions

Surface mounted. Suitable for concrete, masonry and timber mounting. Mount Channel required. Refer to Product Page or Technical Resources page to download Installation Sheet.

Warranty

3 years.
 Refer to Technical Resources page to download Warranty Statement.

Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

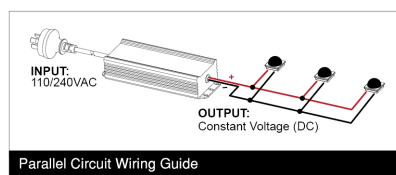


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.


Linear Neon Side Flex 1m

GANL-LNSF6x12-1m

Data Sheet

Accessories

Associated accessories sold separately. Refer to Accessories.



NEON SIDE
FLEX
CHANNEL
6X12 1M

Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



DC CABLE
2.9MM² 100M



ADHESIVE
LINED END
CAP 12-4MM
50 PIECES



POWER
SUPPLY
UNIT 60W