

**Data Sheet** 



### **Physical Specification**

Body Quality corrosion resistant brass construction.

Lens Clear tempered glass.

Mounting Options Surface wall mounted.

Weight (kg) 1.1

Operating Tempurature -20øC to +50øC

IP Rating IP65

## **Electrical Specification and Performance**

Input Voltage 12-24V AC/DC

Total Load 7 watts (maximum). Lamp not included.

Remote Power Supply Ensure remote ELV power supply and lamp match before use (sold

separately).

Control Requires clean on/off signal. If switching via automation relays use

on/off.

Certifications



#### **Finishes**









BLK Matt Black powder coat

BZE Bronze
COP Copper
NKL Nickel

#### **Installation Instructions**

Surface wall mounted.

Refer to Product Page or Technical Resources page to download Installation Sheet.

### **Standard or Custom Configurations**

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix as shown below.





**Data Sheet** 

## **Light Performance**


Photometrics Photometric

Diagram is based on test results as referred. Refer to Technical Resources

page to view Photometric Diagram where applicable.

WDS LIGHTING PERFORMANCE - IES

IES Refer to Technical Resources page to download IES file.

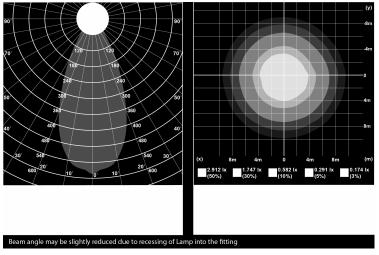

# Warranty

5 years (fitting only).

Refer to Technical Resources page to download Warranty Statement.

# Wiring Guide

Refer to Techncial Resources page to download Wiring Diagram/s.

#### **Accessories**

Associated accessories sold separately. Refer to Accessories.







POWER SUPPLY UNIT 60W



**Data Sheet** 

### **Related Items for Installation**

The following items are available to assist with installation and/or warranty compliance.



DC CABLE 2.9MM<sup>2</sup> 100M



ADHESIVE LINED END CAP 6-2MM 50 PIECES



LED MR16 6W WARM WHITE



POWER SUPPLY UNIT 60W

# **Related Fittings in Range**

The following fittings are also available in the Wall Lights MR16 range.



UP/DOWN WALL LIGHT MR16 COP