


### Physical Specification

Body	Quality corrosion resistant brass construction.
Lens	Clear tempered glass.
Reflector	High efficiency, reflective coated polycarbonate. 40° reflector fitted Standard. 20°/60° optional. Refer to Custom Configuration Matrix.
Mounting Options	Ground or surface. Stake (220mm) included. Surface Mount accessory available.
Weight (kg)	1.8
Operating Temperature	-20°C to +50°C
IP Rating	IP66

### Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	11 watts. >90 lumens per watt.
Driver	Driver onboard technology.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately). Consider adding remote control and constant voltage.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control
Certifications	 E4635

### Finishes



- BLK Matt Black powder coat
- BZE Bronze

### Installation Instructions

Ground or surface. Stake (220mm) included. Surface Mount accessory available.  
 Refer to Product Page or Technical Resources page to download Installation Sheet.

**Standard or Custom Configurations**

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix or copy the standard item code below to order:

GANL-A11-11W-2700-40D-BZE

GANL	A11	11W	2700	40D	FINISH
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>COLOUR TEMP (K)</b>	<b>REFLECTOR</b>	<b>FINISH</b>
GANL	A11	11W	2700	▼ 40D	BLK
					■ BZE

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available for customisation. For information, speak to your local Commercial Distributor. To assist with specification, simply refer to the GANX item code below:

GANX-A11-11W-X-CV-24VDC-2700-80-40-BZE-X-CL

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

GANX	A11	11W	X	CV	24VDC	2700	80	40	FINISH	X	CL
<b>GAN PREFIX</b>	<b>SERIES</b>	<b>TOTAL LOAD</b>	<b>DIMMING</b>	<b>INPUT TYPE</b>	<b>INPUT VOLTAGE</b>	<b>LIGHT SOURCE (K)</b>	<b>CRI</b>	<b>REFLECTOR</b>	<b>FINISH</b>	<b>HEX LOUVRE</b>	<b>LENS</b>
GANX	A11	4W	D	CV	24VDC	2700	80	▼ 20D	BLK	■ HX	○ CL
		8W	X			3000	90	▼ 40D	■ BZE	○ X	○ FR
		11W				4000	90	▼ 60D			

**Light Performance**

Refer to next page for lighting performance diagrams.

**Light Performance**




Photometrics

Photometrics

Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.

IES

IES Refer to Technical Resources page to download IES file.

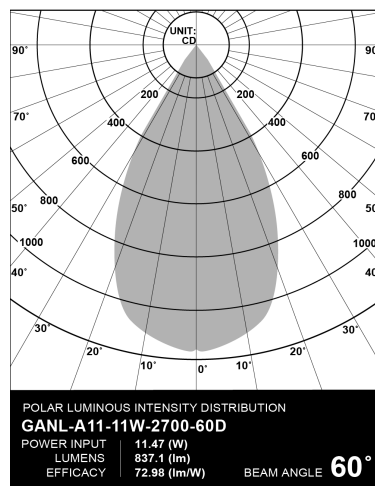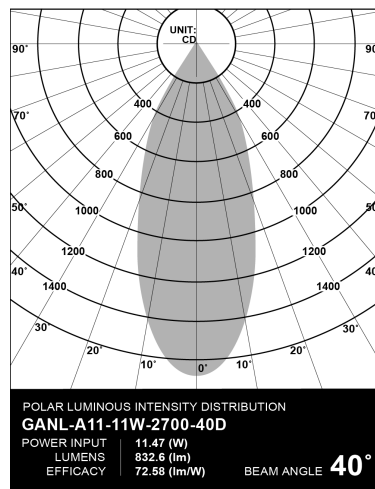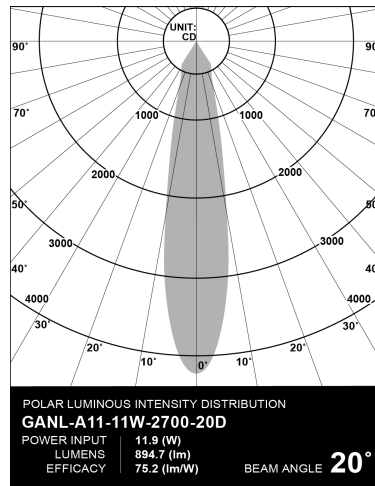

### Warranty

5 years.  
 Refer to Technical Resources page to download Warranty Statement.

### Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.

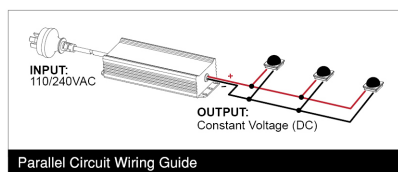


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

### Accessories

Associated accessories sold separately. Refer to Accessories.



ACCENT 11  
HOOD BZE



RISER 220  
BZE



RISER 420  
BZE



SURFACE  
MOUNT BZE

### Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



DC CABLE  
2.9MM<sup>2</sup> 100M



ADHESIVE  
LINED END  
CAP 12-4MM  
50 PIECES




POWER  
SUPPLY  
UNIT 60W

### Related Fittings in Range

The following fittings are also available in the Accent Lights range.



ACCENT 5  
BZE



ACCENT 8  
BZE