


# Step Light Linear Recessed 210 Copper


Data Sheet

## Physical Specification




Body	Quality corrosion resistant brass construction.
Lens	Frosted tempered glass.
Mounting Options	Recessed step or wall mounted. Custom designed canister available for concrete installation.
Weight (kg)	1
Operating Temperature	-20øC to +50øC
IP Rating	IP66

## Electrical Specification and Performance

Input Voltage	24VDC.
Total Load	4 watts. >90 lumens per watt.
Driver	Driver onboard technology.
Remote Power Supply	Recommended Meanwell HLG Series 24VDC constant voltage (sold separately). Consider adding remote control and constant voltage.
Control	Requires clean on/off signal. If switching via automation relays use on/off. Do not use dimming relays as these may leak residual voltage.
Dimming	Triac or Dali available with approved Power Supply and compatible dimming control
Certifications	

## Finishes

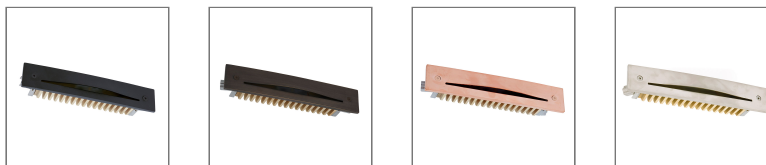

- BLK Matt Black powder coat
- BZE Bronze
- COP Copper
- NKL Nickel

## Installation Instructions

Recessed step or wall mounted. Custom designed canister available for concrete installation. Refer to Product Page or Technical Resources page to download Installation Sheet.

# Step Light Linear Recessed 210 Copper

Data Sheet

## Standard or Custom Configurations

Standard range - locally stocked item

Designed to suit a variety of residential and landscaping applications the Standard range is readily available from your local Distributor. To identify your unique ordering code simply add your chosen finish to the end of the code matrix as shown below.

GANL	SLLR210	4W	2700	FINISH
GAN PREFIX	SERIES	TOTAL LOAD	LIGHT SOURCE (K)	FINISH
GANL	SLLR210	4W	2700	BLK
				BZE
				COP
				NKL

Custom configuration - commercial specification

If required, we can provide a Custom solution to suit your large residential or commercial project. The following code matrix shows the options available. Production, costs and timing will vary depending on customisation. For assistance, speak to your local Commercial Distributor.

Stocked Commercial Distributor configuration shown below or Distributor customisation can be configured using this matrix.

GANX	SLLR210	4W	X	CV	24VDC	2700	80	FINISH	FR
GAN PREFIX	SERIES	TOTAL LOAD	DIMMING	INPUT TYPE	INPUT VOLTAGE	LIGHT SOURCE (K)	CRI	FINISH	LENS
GANX	SLLR210	4W	D	CV	24VDC	2700	80	BLK	FR
			X			3000	90	BZE	
						4000	90	COP	
								NKL	

Dimming: Triac or Dali available with approved Power Supply and compatible dimming control

## Light Performance


Photometrics

Photometrics

Diagram is based on test results as referred. Refer to Technical Resources page to view Photometric Diagram where applicable.

IES

IES Refer to Technical Resources page to download IES file.

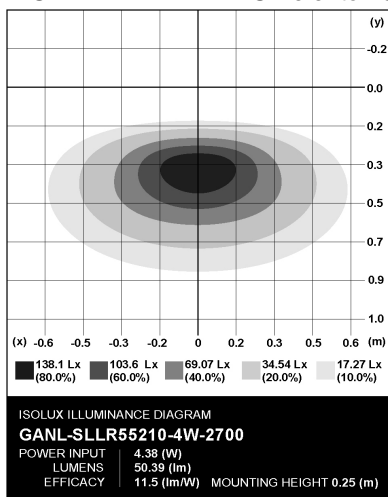

# Step Light Linear Recessed 210 Copper

Data Sheet

## Warranty

5 years. Applicable on purchases from 01/01/19.  
 Refer to Technical Resources page to download Warranty Statement.

## Wiring Guide

Refer to Technical Resources page to download Wiring Diagram/s.


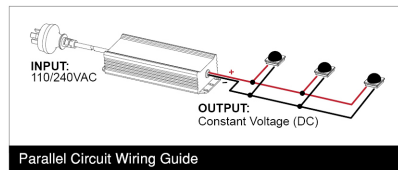


Diagram is a guide only. Wire colours and polarity may change depending on fixture and country.

## Accessories

Associated accessories sold separately. Refer to Accessories.



**CANISTER  
210**

## Related Items for Installation

The following items are available to assist with installation and/or warranty compliance.



**DC CABLE  
2.9MM² 100M**



**ADHESIVE  
LINED END  
CAP 12-4MM  
50 PIECES**



**POWER  
SUPPLY  
UNIT 60W**

## Step Light Linear Recessed 210 Copper


---

Data Sheet

### Related Fittings in Range

---

The following fittings are also available in the Step Lights range.



STEP LIGHT  
LINEAR  
RECESSED  
120 COP